




TOP VIEW

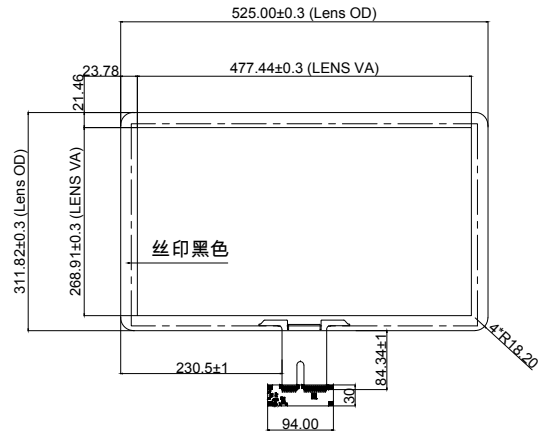

SIDE VIEW



BACK VIEW

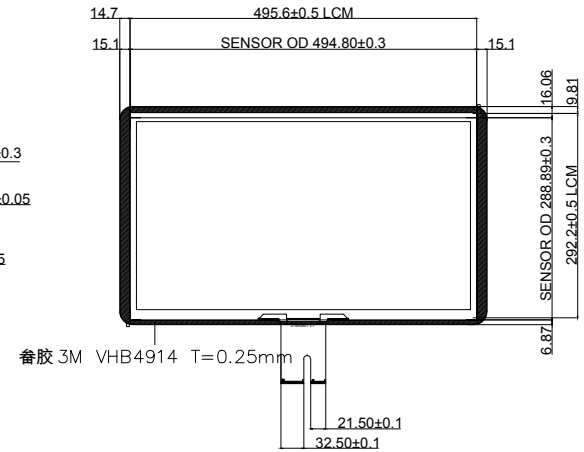

Notes :

1. G+G

Cover Glass:2.0mm

SCA : 0.2mm

Glass Sensor:1.1mm

Total Thickness : 3.3±0.3mm

IC :NQ2510P.C3.P3.V1

Numbers of Channel : RX60*TX35

2.Transmittance :≥82% ;

3.Hardness : ≥6H(750g) ;

4.Operating Temperture : -20°C~+70°C , ≤90%RH ;

5.Storage Temperture : -30°C~+80°C , ≤90%RH ;

6.Tolerance±0.2mm ;

Compliance with ROHS

(USB通讯)

PIN	定义
1	VBUS
2	DN
3	DP
4	GND

Victronix Tecenstar INT'L Co., LTD						
DRAWN BY:	Solon	2024-12-24	TITLE ID:	CTP-VX215A5698-GG	UNITS?	MM
CHECKED BY:			CUSTOMER ID?		SCALE:	1:1
APPROVED BY:			MANAGE ID?	Ver.1	PAGE :	1/1