



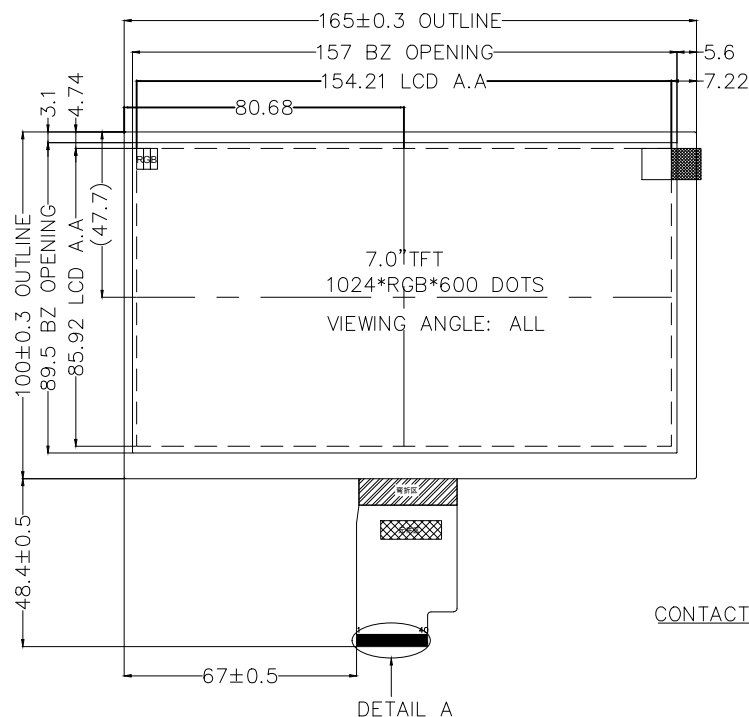


FRONT BACK
COMPONENTS H=1.5 MAX
CONTACT SIDE STIFFENER PI
*0.3±0.05

LED CIRCUIT DIAGRAM:



3*10=30EA If=350mA



40 PIN FOR LCM

PIN	FUNCTION
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIM0(NC)
28	SELB(HSD)
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+

NOTES:

1. DISPLAY TYPE: 7.0" TFT, NORMALLY BLACK
2. VIEWING DIRECTION : U/L/D/R 80/80/80/80
3. Driver IC : EK79001HN/EK73215BCGA
4. Top : -30°C ~ 85°C, Tst : -30°C ~ 85°C
5. GENERAL TOLERANCE: ±0.2
6. LCM Luminance: 1000cd/m (Typical)

Approved By		SIZE: 7inch TFT Module
Checked By		DWARING_NO.: VXT700QAEW-01
Drawn By	Solon 2020.7.27	CUSTOMER_NO.
UNIT: mm		